
## [Feb-2016 Dumps PassLeader Free 642-035 Study Guide with 175q Questions and Answers

New Updated 642-035 Exam Questions from PassLeader 642-035 PDF dumps! Welcome to download the newest PassLeader 642-035 VCE dumps: http://www.passleader.com/642-035.html (175 Q&As) Keywords: 642-035 exam dumps, 642-035 exam questions, 642-035 VCE dumps, 642-035 PDF dumps, 642-035 practice tests, 642-035 study guide, 642-035 braindumps, Troubleshooting Cisco Unified Computing (DCUCT) Exam NEW QUESTION 131On a Cisco Nexus 5000 Series Switch, which two options are valid traffic sources that can be monitored, when configuring a SPAN session for a port channel? A. egress and the SAN port channel onlyB. ingress and the SAN port channel onlyC. ingress and egress onlyD. ingress, egress, and the SAN port channel Answer: B NEW QUESTION 132You attempt to boot a supported Linux operating system live image from the eUSB in a Cisco UCS blade-server environment, but the boot fails. Which option is the most likely cause of the failure? A. In the Service Profile, a device other than the eUSB is set first in the boot order for the server.B. The eUSB license is unavailable or the grace period of the license is expired.C. The blade servers are unable to boot from the eUSB. The eUSB is used only for virtual machines.D. Access to the eUSB is disabled for that blade server by Power Manager. Answer: A NEW QUESTION 133Hotspot





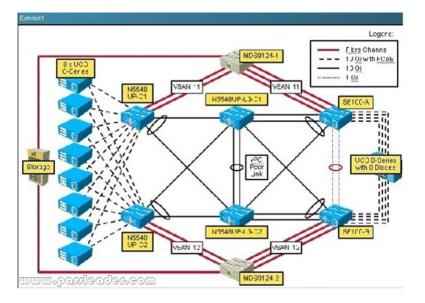

Why is Virtual Fibre Channel interface 19 in err-disable state? A. Missing transceiverB. Virtual interface is not bound to a physical interfaceC. The associated physical interface is downD. VSAN to VLAN binding mis-configured Answer: D NEW QUESTION 134...... NEW QUESTION 144You use dynamic vNICs. You create a new service profile. You receive an error message that indicates that you exceeded the number of dynamic vNICs. Which two components can affect the maximum number of dynamic vNICs in the Cisco UCS environment? (Choose two.) A. the model of the fabric interconnectsB. the number of chassis uplinksC. the model of the FEXD. VMDirectPath sizing Answer: AB NEW QUESTION 145You discover that a new blade server encounters power spikes during peak hours. Which action occurs during the power spikes if you use manual blade-level power capping? A. The blade shuts down.B. An alert is generated.C. Power is reduced.D. The chassis enters standby mode. Answer: C NEW QUESTION 146Which two statements about the Cisco UCS FSM are true? (Choose two.) A. The FSM is run on the DME.B. The FSM is a workflow model with a finite number of stages.C. The FSM is a process to upgrade the firmware. D. Cisco UCS has two FSMs.E. The FSM is used to observe the physical, logical, and virtual components on the Cisco UCS. Answer: AB NEW QUESTION 147Using CLI/GUI to troubleshoot packet flow from server to the fabric, you discover that the blade server 1/7 in a Cisco UCS B-Series Blade Server is running slower than expected. You must troubleshoot the problem by using packet tracing. Which three commands can you use to identify the uplink from the Cisco UCS Fabric Interconnect to the external network of the server? (Choose three.) A. show pinning server-interfacesB. show pinning border-interface activeC. show service-profile circuit server 1/7D. show fex detailE. show pinning border-interfaceF. show interface-fex fabric **Answer:** ABC NEW QUESTION 148On a Cisco UCS C-Series Rack-Mount Server, which state of the DIMM fault LED indicates a faulty DIMM module? A. OFFB. flashing redC. solid amberD. flashing amberE. flashing blue Answer: C NEW QUESTION 149A customer deploys a new Cisco UCS environment and is deploying new ESXi hosts. The customer fails to establish network connectivity to the KVM console. Which option is the most likely cause of the problem? A. wrong UUIDB. missing user rights C. IP addressing overlapD. NIC pinning Answer: C NEW QUESTION 150You attempt to perform an ESXi update on a Cisco UCS C250 server, but the update does not recognize the NICs. You must perform the update as quickly as possible. Which step must you do first? A. Check the UCS compatibility matrix and replace the NIC with a supported one.B. Reconfigure the NIC ID on the LOM.C. Update the LOM firmware by using the Cisco Host Update Utility.D. Update the NIC firmware by using the Cisco Host Update Utility. Answer: C NEW QUESTION 151..... Download the newest PassLeader 642-035 dumps from passleader.com now! 100% Pass Guarantee! 642-035 PDF dumps & 642-035 VCE dumps: http://www.passleader.com/642-035.html (175 Q&As)